



HALO DECK LOADING PLATFORM




Specifications:

| Production Description | Loading Platform Narrow | Loading Platform Wide |
|--|--|--|
| Width | 2.2M | 3.2M |
| Effective Width | 1.6M | 2.6M |
| Product Length | 5.5m - 8.5m | 5.5m - 8.5m |
| Platform Length Exterior To Slab | 1.5m - 4.5m | 1.5m - 4.5m |
| Safe Working Load (Non-destructive tested up to) | 2.5 tons (5.5 tons & 10 tons in other country) | 2.5 tons (5.5 tons & 10 tons in other country) |
| Prop Height Range | 2.2m - 3.6m | 2.2m - 3.6m |
| Surface Treatment | Hot Dip Galvanized | Hot Dip Galvanized |



Drawings:

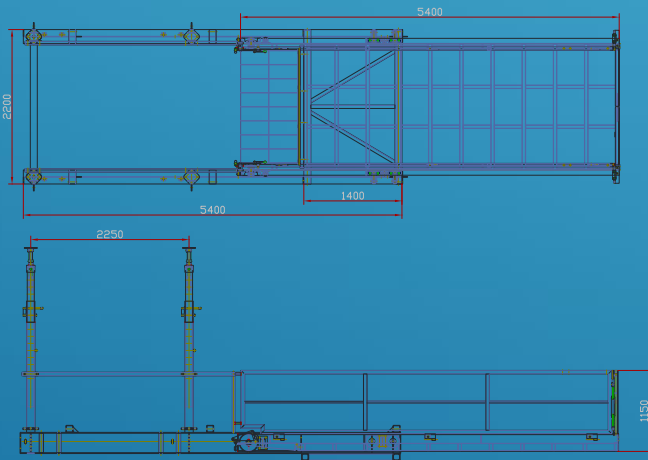


Tightening the prop from ground to avoid safety risk

Retractable roller enables quicker and no-hassle installation

Why HALO DECK?

- MANUAL AND ELECTRICAL OPERATION
- EASY TO INSTALL AND OPERATE
- AUSTRALIAN STANDARD & CERTIFICATED
- GALVANISED SURFACE
- RETRACTABLE SYSTEM
- CLIENT LOGO PRINT AVAILABLE

Project Pictures:

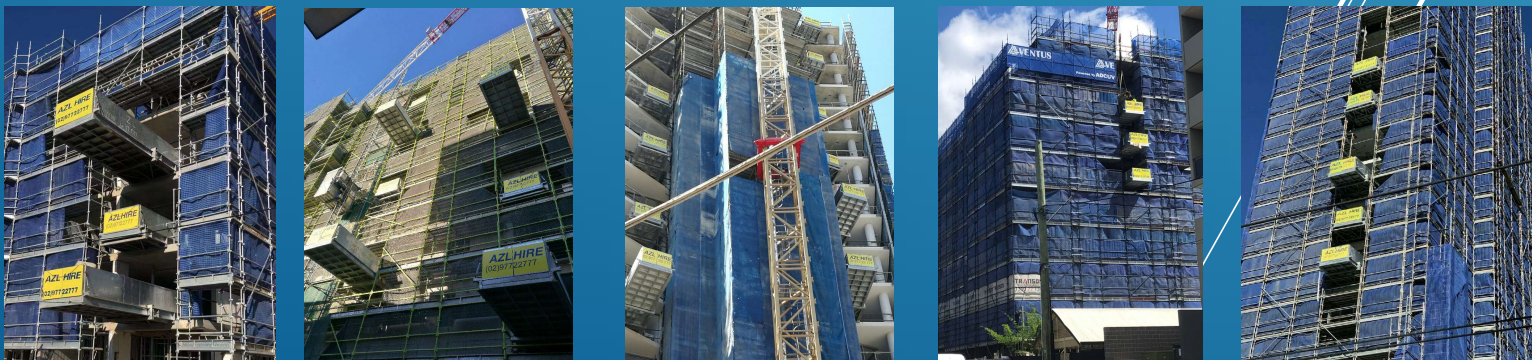

HALO SITE PROTECT, 27-29 FITZPATRICK STREET, REVESBY, NSW
 Adam 0406493880 adam.l@azl.com.au, Jeff 0410591910 jeff.z@azl.com.au